


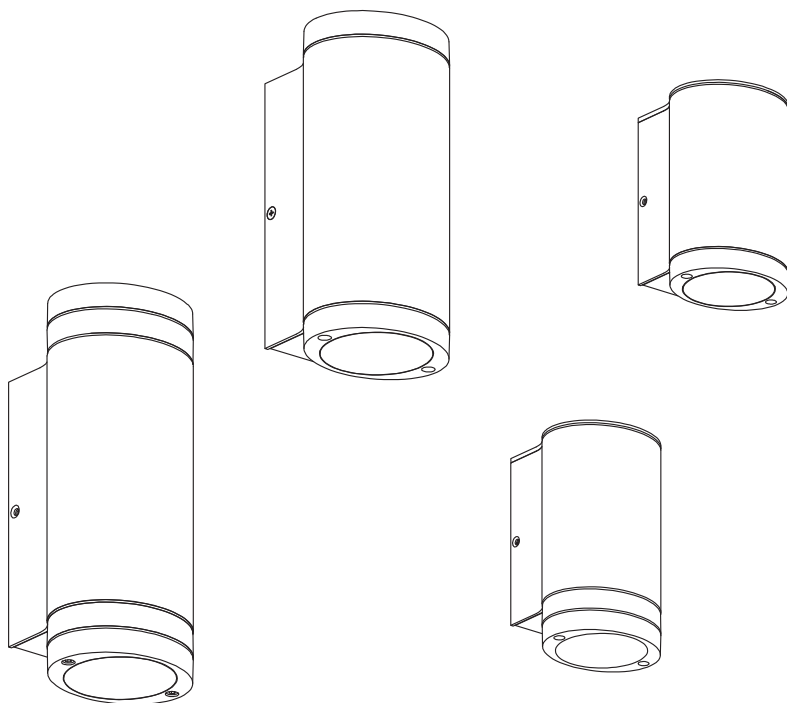
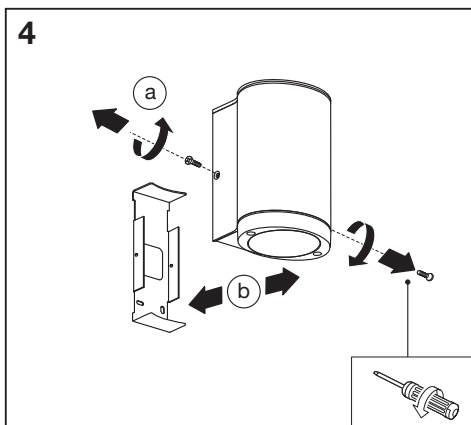
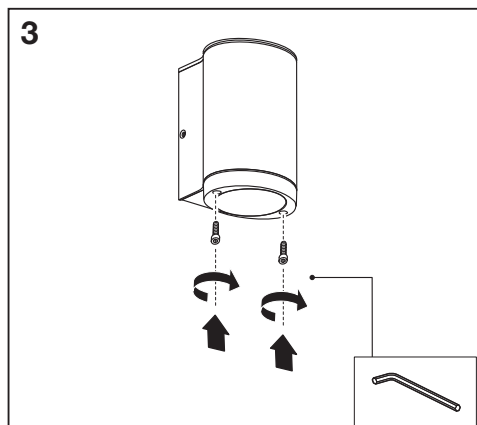
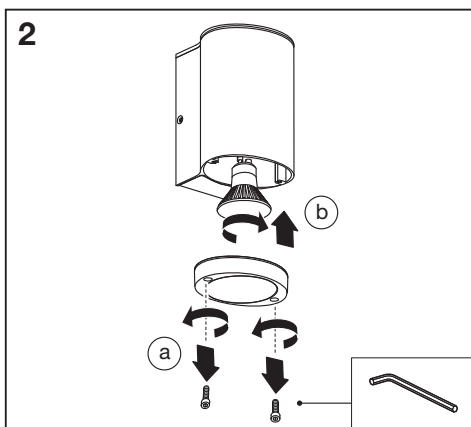
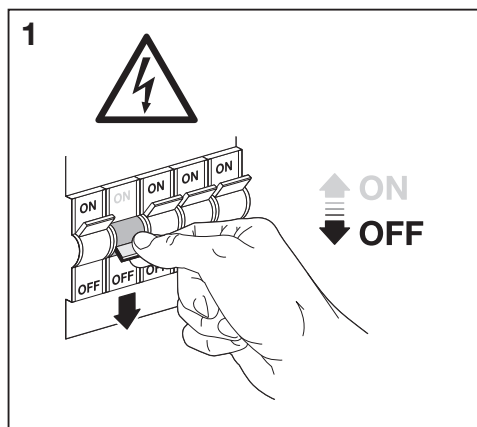
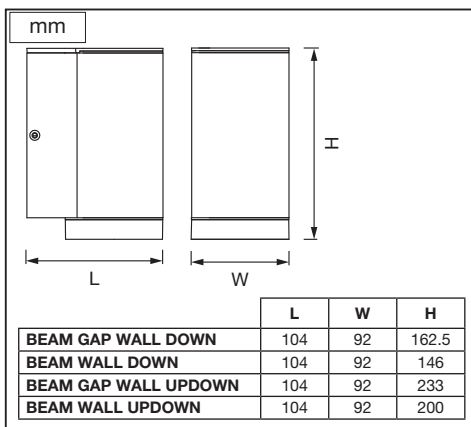
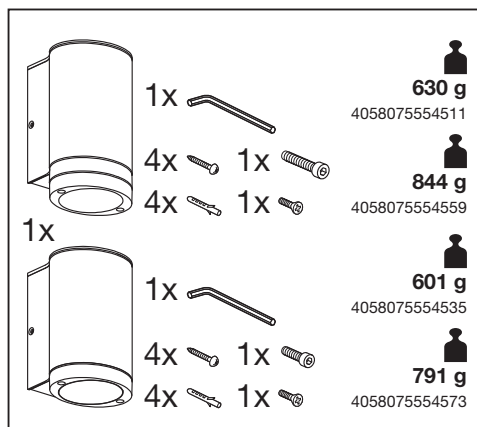
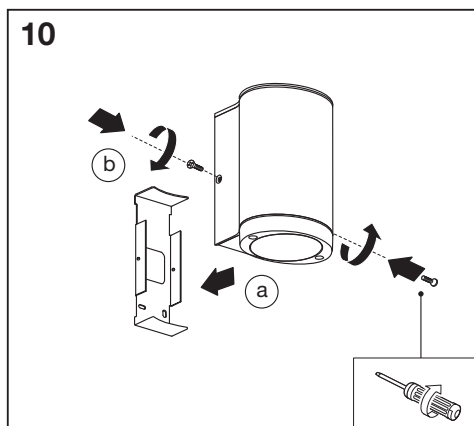
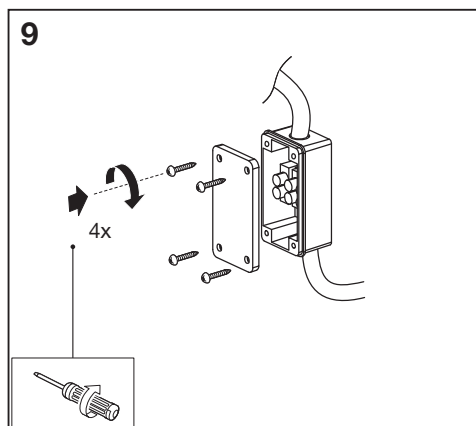
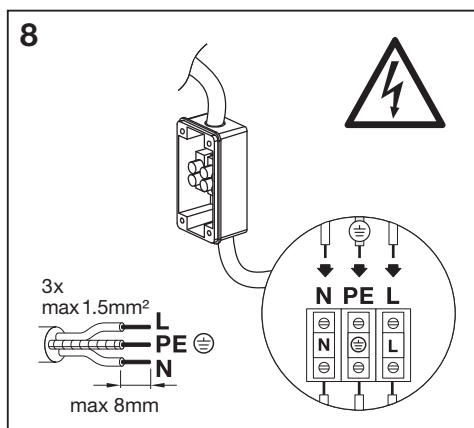


ENDURA® CLASSIC

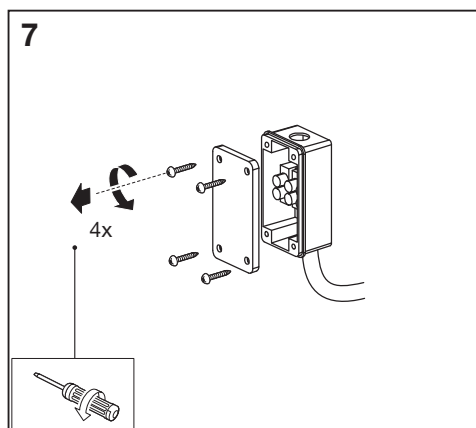


	EAN	W	° (°C)	V~	Hz
ENDURA CLASSIC BEAM GAP GU10 DG	4058075554511	max. 35	-20...+40	220-240	50/60
ENDURA CLASSIC BEAM GU10 DG	4058075554535	max. 35	-20...+40	220-240	50/60
ENDURA CLASSIC BEAMGAPUPDOWN GU10DG	4058075554559	max. 35	-20...+40	220-240	50/60
ENDURA CLASSIC BEAM UPDOWN GU10 DG	4058075554573	max. 35	-20...+40	220-240	50/60

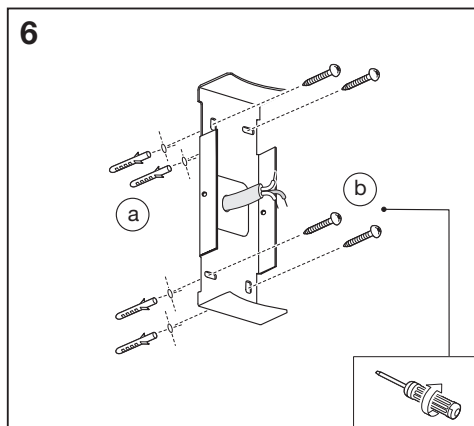

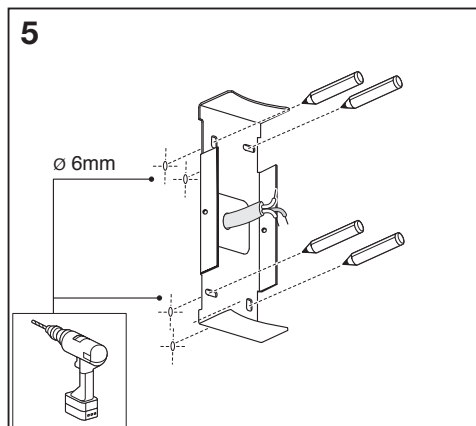


11




12



↑ ON
↓ OFF



13

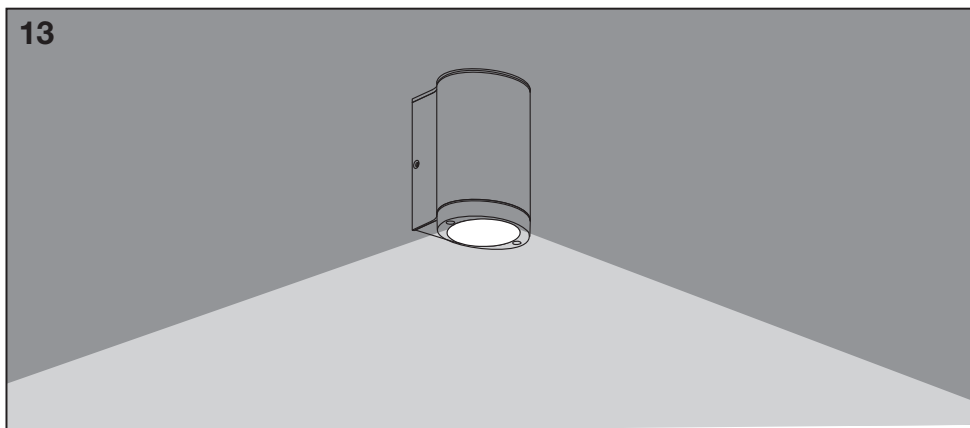

CE ENEC 001



IP44

C10449057
G11107060
11.12.2020



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com