



1




Turn off the general switch

2




Rotate the metal cap to detach

3




Drill holes & apply plastic anchors
& Screws

4

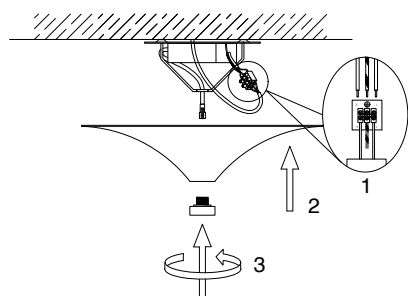


Connect the wires
& rotate the metal cap

5

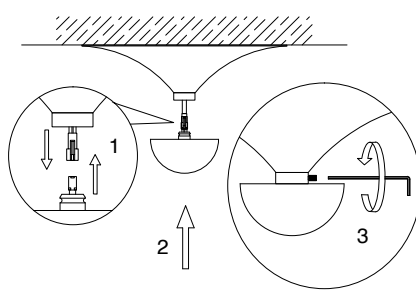

Connect the plug & fix in to place
the cover with the metal cap

6

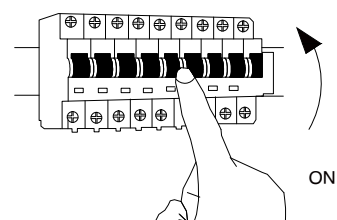

Turn on the general switch

